

## Ventilation Equipment 304 S/S Wall Hood+Filters 2800X1400mm

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



642011 (EP1428T)

304 s/s wall hood with filters

### Short Form Specification

**Item No.** \_\_\_\_\_

Constructed in 304 AISI stainless steel. Continuously welded joints. Equipped with labyrinth filters in 304 AISI stainless steel, blind panels in 304 AISI stainless steel, grease collecting trough all around and condensate collecting tray.

### Main Features

- External panels with upturned edges to avoid injuries.
- Prearranged for installation of lighting.
- Low noise level.

### Construction


- Eyebolts and screw anchors for ceiling installation.
- 304 AISI stainless steel condensation collection tray.
- Labyrinth filters guarantee constant filtration to avoid clogging and to protect against fire.
- 304 AISI stainless steel blind panels for a correct exhaustion.
- Outlet holes are sized in order to minimize drops in pressure.
- Perimetral gutter with drain hole to transfer grease into a 304 AISI container.
- Entirely constructed in 304 AISI stainless steel.
- 304 AISI stainless steel labyrinth filters easily removable for cleaning.

### Optional Accessories

- Drain for hoods diam.1/2" (m) with plug PNC 640409 ☐
- Speed variator for motors up to 1.7 kW PNC 640686 ☐

APPROVAL: \_\_\_\_\_

#### Top

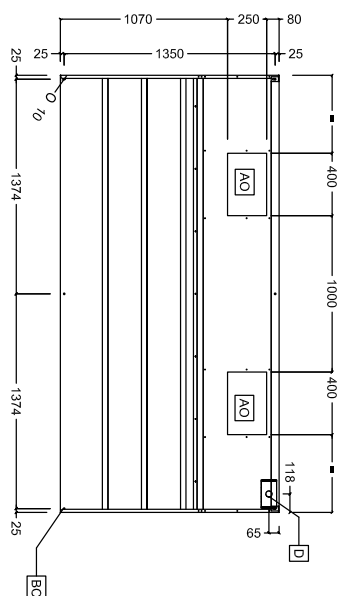

#### Key Information:

External dimensions, Width:

642011 (EP1428T) 2800 mm

External dimensions, Depth: 1400 mm


External dimensions, Height: 500 mm

Net weight: 76 kg

#### Air Emission:

Air capacity: 4400 mc/h

#### Side

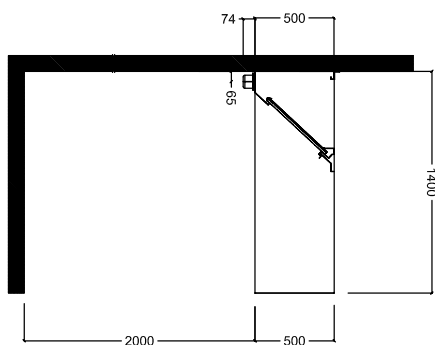

#### Front

