


FR

(Faceted Reflector)




SR


(Specular Reflector)

Item Description	EAN	Power (W)	CCT (K)	IP	IK	Ta °C	Vac	Hz	PF	Ra	Beam Angle(°)	KG	Diameter (mm)
LED Downlight Spectre FR IP54 13W 3000K-5700K 3-CCT Ø145mm Cutout Ø125-135mm	8720094601687	13	3000/4000/5700	IP54	IK06	-20 ~ +40	220-240 V	50/60 Hz	≥0.9	≥ 80	90	0.28	145
LED Downlight Spectre FR IP54 18W 3000K-5700K 3-CCT Ø172mm Cutout Ø150-165mm	8720094601694	18	3000/4000/5700	IP54	IK06	-20 ~ +40	220-240 V	50/60 Hz	≥0.9	≥ 80	90	0.35	172
LED Downlight Spectre FR IP54 18W 3000K-5700K 3-CCT Ø228mm Cutout Ø200-210mm	8720094601700	18	3000/4000/5700	IP54	IK06	-20 ~ +40	220-240 V	50/60 Hz	≥0.9	≥ 80	90	0.52	228
LED Downlight Spectre FR IP54 25W 3000K-5700K 3-CCT Ø228mm Cutout Ø200-210mm	8720094601717	25	3000/4000/5700	IP54	IK06	-20 ~ +40	220-240 V	50/60 Hz	≥0.9	≥ 80	90	0.52	228
LED Downlight Spectre SR IP54 13W 3000K-5700K 3-CCT Ø145 Cutout Ø125-135mm UGR<19	8720094601731	13	3000/4000/5700	IP54	IK06	-20 ~ +40	220-240 V	50/60 Hz	≥0.9	≥ 80	60	0.28	145
LED Downlight Spectre SR IP54 18W 3000K-5700K 3-CCT Ø172 Cutout Ø150-165mm UGR<19	8720094601748	18	3000/4000/5700	IP54	IK06	-20 ~ +40	220-240 V	50/60 Hz	≥0.9	≥ 80	60	0.35	172
LED Downlight Spectre SR IP54 18W 3000K-5700K 3-CCT Ø228 Cutout Ø200-210mm UGR<19	8720094601755	18	3000/4000/5700	IP54	IK06	-20 ~ +40	220-240 V	50/60 Hz	≥0.9	≥ 80	60	0.52	228

### Inrush current

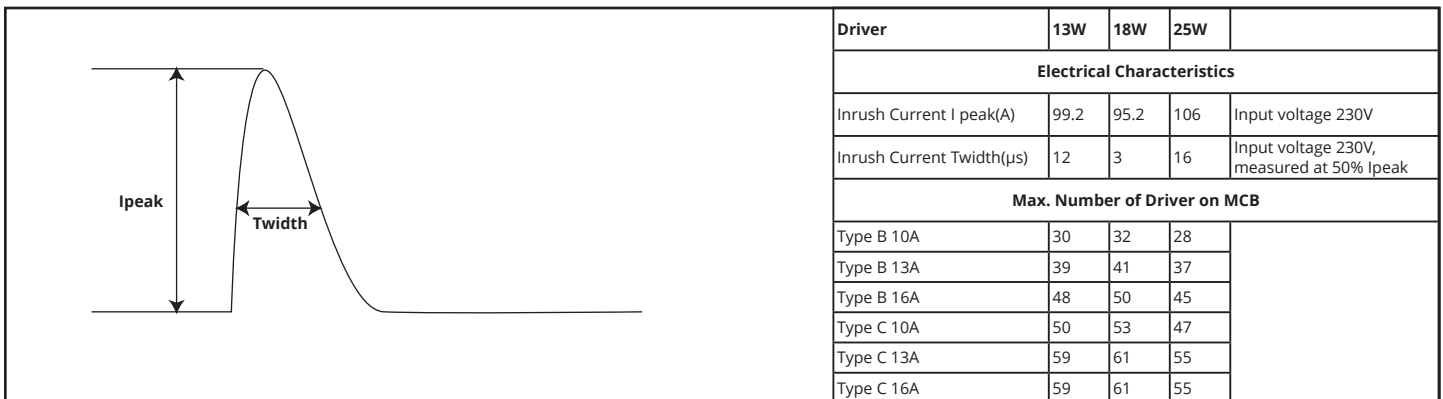

### Dimensions

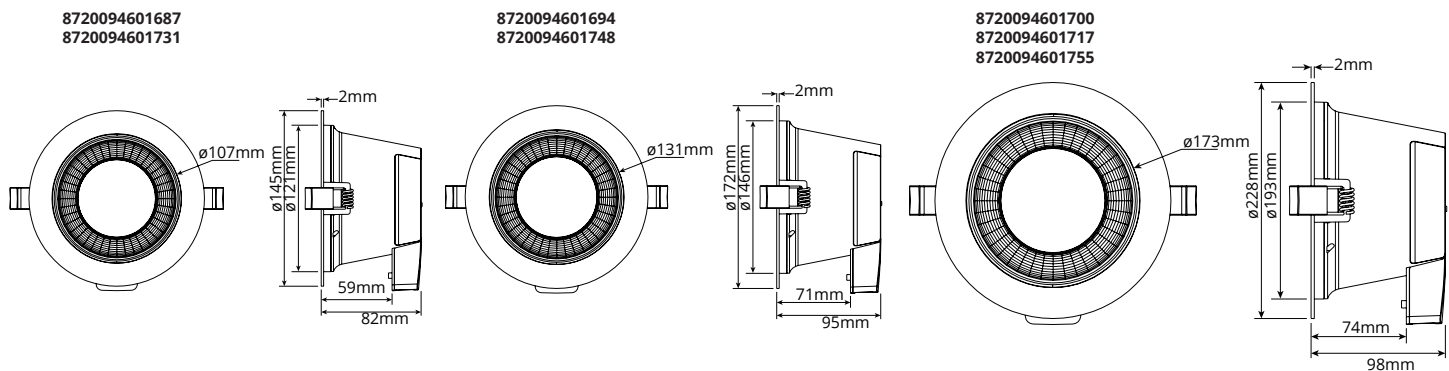

## Installation

25mm 25mm 25mm

Cutout ø

EAN	Cutout ø (mm)
8720094601687	125-135
8720094601694	150-165
8720094601700	200-210
8720094601717	200-210
8720094601731	125-135
8720094601748	150-165
8720094601755	200-210

OFF

WW:3000K  
NW: 4000K  
CW: 5700K

— L = Brown  
— N = Blue  
⊕ = Yellow-Green

ON

1x 2x 3x ..... ≤10


Mains

**Through-wiring Possible**

✓ ⊕ + ⊕  
✓ ⊕ + ⊕  
X ⊕ + ⊕

## Warning

- Only qualified electrician is allowed to do installation, maintenance and inspection for safety concern. It is dangerous for non-professional operators.
- Power should be cut off before installation, maintenance or inspection.
- Please install and use the product strictly according to the instruction.
- Do not disassemble or remold the product at will to avoid accident of electric shock or light falling.
- Working out of temperature range of -20 ~ +40 will shorten the lifetime of the product.



PDL Lighting Group B.V.  
Mispelhoefstraat 31A  
5651GK Eindhoven  
The Netherlands  
www.pragmalux.com