



BOURGEAT

LA MOBILITÉ DU GOÛT

EXCEPTIO, RACKING TROLLEYS REINFORCED RANGE - FLAT-PACK MODELS



COMFORTABLE TO USE

OPTIONAL 150 MM DIAM. CASTORS
FOR REDUCING PUSHING EFFORT

SAFE

ROUNDED EDGE RUNNERS WITH
LOCKING STOPS - CASTORS WITH
BRAKES

100% RECYCLABLE

EXCEPTIO flat-pack racking trolleys : efficiency in movement.

This range of flat-pack racking trolleys is specifically designed for intensive indoor and outdoor use.

100% stainless steel, they combine **robustness, hygiene, and durability**.

Mobilité optimale

Fitted with **4 high-performance swivel castors** (D.125 mm).

The 150 mm-diameter castors option improves clearance over thresholds and tailgates while reducing pushing effort.

Security

Rounded edge runners with locking stops to secure GN pans, trays, etc.

EXCEPTIO combines **practicality, solidity and professionalism**.

**SPECIFICATIONS**

- Stainless steel* design.
- Curved arch structure in 25x25 mm stainless steel square tube - 1.5 mm thick.
- Shelves fitted with rounded edge runners with locking stops.
- Castors (Ø 125 mm), 2 with brakes. Stainless steel pivot, fork, and bearing. Temperature range of the wheels: -20°C / +60°C.
- Bumper stops.
- 100% recyclable.
- NF Food Hygiene certified.
- Flat-pack delivered :
 - 5 tubular braces of Ø 18 mm, 1,2 mm thick, to be fitted into the tubes of the ladder frames.
 - 6 mm screws for fixing the braces, to be assembled with 6 mm washers.
 - Tightening with N°10 spanner, supplied.


OPTION

- Castors (Ø 150 mm), 2 with brakes. Stainless steel pivot, fork, and bearing. Temperature range of the wheels: -20°C / +60°C.

ACCESSORIES

- Magnetic pocket - A4 size - to display traceability documents.
- Re-usable covers : Low density, food quality polyethylene cover, antibacterial treatment, transparent, 130 microns thick. Equipped with zip fasteners with reinforced edges. Do not wash and dry in machine (only wash with water jet or by hand).
- Disposable covers : Covers in low density polyethylene, 15 microns thick. Box of 300 covers or roll of 200 covers.
- Insulated cover : glass fabric with 2-sided light grey Polyurethane coating. Resistance 200°C. Four zips. Water jet or hand-washable.
- To avoid potentially dangerous handling, do not use our GN2/1 containers (stainless-steel or polycarbonate) deeper than 100mm on our GN2/1 racking trolleys but on our GN container trolley.

*Our stainless steel contains around 90% recycled stainless steel.

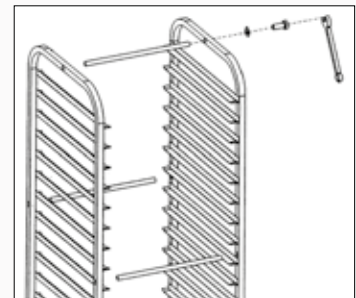

Obtaining the NF mark is a process decided by the company. This mark, recognising quality, is awarded to products by AFNOR based on their compliance with French and European technical standards and specifications. The NF mark guarantees that you are buying products that comply with regulatory requirements. Some of our products have been awarded the NF Food Hygiene mark, issued by AFNOR Certification 11, avenue Francis de Pressensé - 93571 Saint Denis La Plaine Cedex. www.marque-NF.com. This mark certifies compliance with standard NF 031. The certified characteristics are equipment cleaning and suitability for their intended use. The products awarded this mark are identified with the NF pictogram.



FLAT-PACK RACKING TROLLEYS

Models	GN1/1	GN2/1	"Caterer" 600x400	«Caterer»
Profile	325 mm	530 mm	600 mm	410 mm
Overall length	460 mm	660 mm	730 mm	540 mm
Overall width	630 mm	750 mm	500 mm	700 mm
Overall height	1700 mm	1700 mm	1700 mm	1700 mm
Net weight	17,5 kg	19,5 kg	20 kg	21 kg
Max load per shelf	20 kg	20 kg	20 kg	20 kg
Total max load	250 kg	250 kg	250 kg	250 kg
15 levels - Space 89 mm	775915	774915	772915	773915
20 levels - Space 67 mm	775920	774920	773920	772920

OPTION

Castors Ø 150 mm, stainless steel fork	776030	776030	776030	776030
----------------------------------------	--------	--------	--------	--------

ACCESSORIES

Re-usable cover	775800	774800	774800	774800
Disposable covers - In carton of 300 covers	322022	322024	322024	322024
Disposable covers - Roll of 200 covers	716766	716768	716762	716762
Insulated cover	775803	-	-	-
Magnetic pocket	844005	844005	844005	844005

All these trolleys are fitted with Ø 125 mm stainless steel wheels, 2 with brakes for safer use. These wheels meet the requirements of NF approval.



Optional castors diam.150 mm



Magnetic pocket - A4 size