

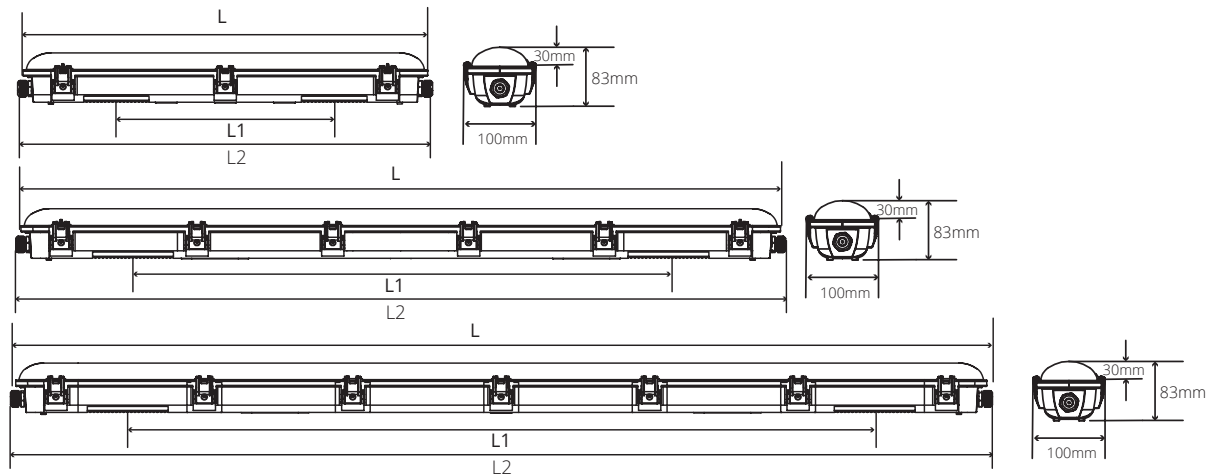






Item Description	EAN	Power (W)	CCT (K)	IP	IK	Ta (°C)	Vac	Hz	PF	CRI (Ra)	KG	L (mm)	L1 (mm)	L2 (mm)
LED Waterproof Zeus IP66 20W 600 4000K Incl. 5x2.5mm TW	8720094600727	20	4000	IP66	IK08	-25 ~+40	220-240	50/60	≥0.9	≥80	0.95	660	350	680
LED Waterproof Zeus IP66 20W 1200 4000K Incl. 5x2.5mm TW	8720094600710	20	4000	IP66	IK08	-25 ~+40	220-240	50/60	≥0.9	≥80	1.55	1220	860	1240
LED Waterproof Zeus IP66 35W 1200 4000K Incl. 5x2.5mm TW	8720094600703	35	4000	IP66	IK08	-25 ~+40	220-240	50/60	≥0.9	≥80	1.55	1220	860	1240
LED Waterproof Zeus IP66 35W 1500 4000K Incl. 5x2.5mm TW	8720094600697	35	4000	IP66	IK08	-25 ~+40	220-240	50/60	≥0.9	≥80	2	1560	1200	1580
LED Waterproof Zeus IP66 52W 1500 4000K Incl. 5x2.5mm TW	8720094600680	52	4000	IP66	IK08	-25 ~+40	220-240	50/60	≥0.9	≥80	2	1560	1200	1580
LED Waterproof Zeus IP66 62W 1500 4000K Incl. 5x2.5mm TW	8720094600673	62	4000	IP66	IK08	-25 ~+40	-25 ~+40	50/60	≥0.9	≥80	2	1560	1200	1580

### Inrush current

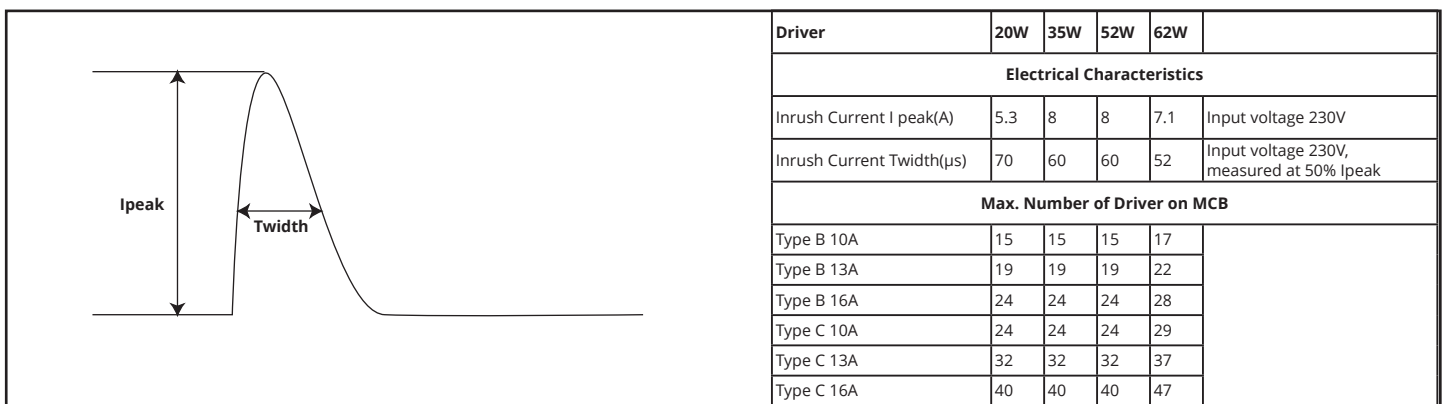

### Installation

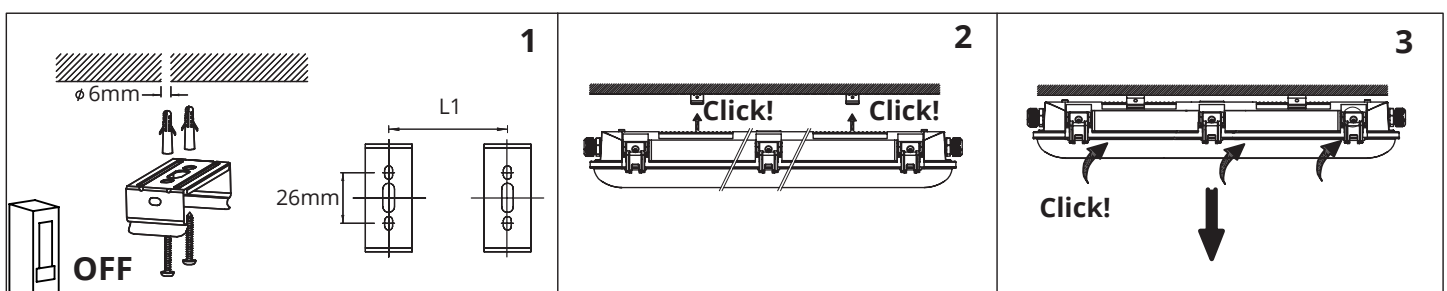

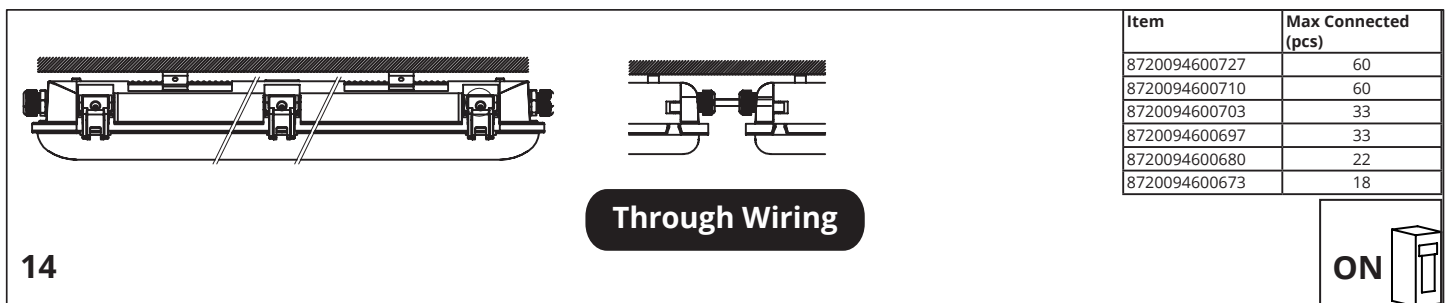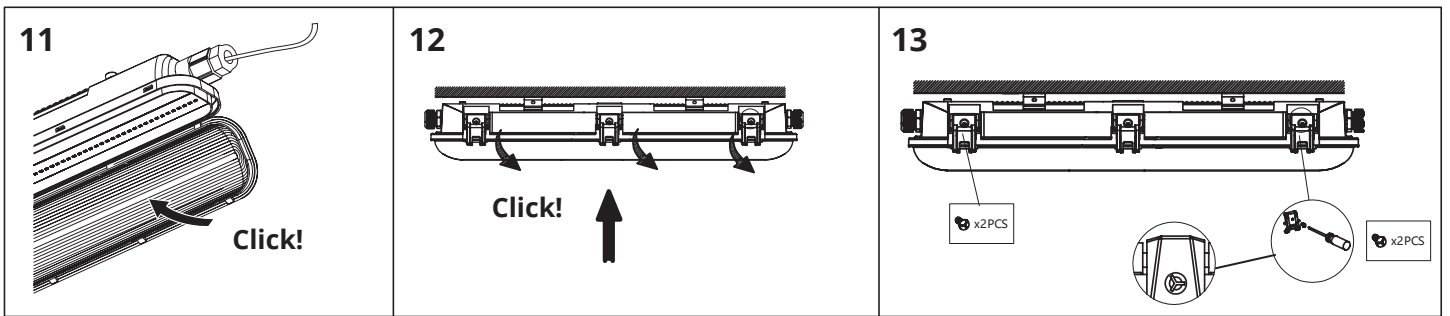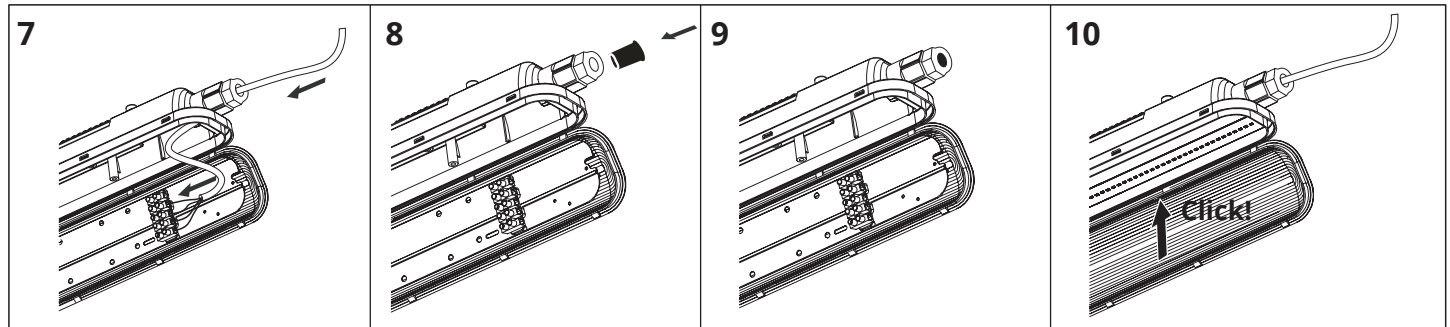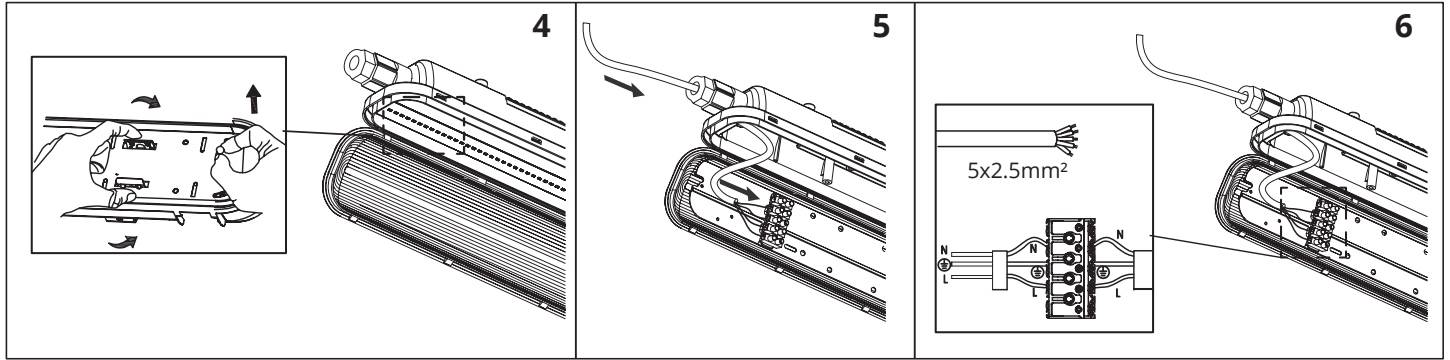

### Warning

- Only qualified electrician is allowed to do installation, maintenance and inspection for safety concern. It is dangerous for non-professional operators.
- Power should be cut off before installation, maintenance or inspection.
- Please install and use the product strictly according to the instruction.
- Do not disassemble or remold the product at will to avoid accident of electric shock or light falling.
- Working out of temperature range of -25 ~ +40 will shorten the lifetime of the product.

