

MADE IN
POLAND

LED



PROMENAD LED

Luminaires dedicated to light urban areas
like parks, subdivisions, leisure areas.



 **intelight**
professional lighting equipment

Modern and ecological park lighting

Promenad LED is elegant fixture with wide purpose.

Dedicated to light:

- leisure areas
- small streets
- playgrounds
- alleys
- parks
- asymmetric version dedicated to mounting along building elevations

Modern, solid and lasting construction.

- IP66 protection rating due to PUR gaskets spilled automatically
- lasting and spare LED technology – light source: LED CREE diodes
- high class materials: body and lampshade made of PC class V0, heat sink made of aluminum mold
- high energy efficiency due to highest class LED diodes


Lighting:

Main


Source of light in Promenad LED are LED diodes with 4000K colour temperature which very precise lights the space. Properly selected lenses and panel with LED diodes construction, evenly distribute light for sideways and around the fixture.
Additional version is fixture with asymmetric distribution which can light only one side of surrounding and can be mounted along building elevation.

Decorative

Colorful lighting of reflector is possible due to use of special LED diodes with green, blue or red colour temperature located on decorative panel in lower part of body.
Soft light is guided up and interplays with lampshade giving great visual effect.

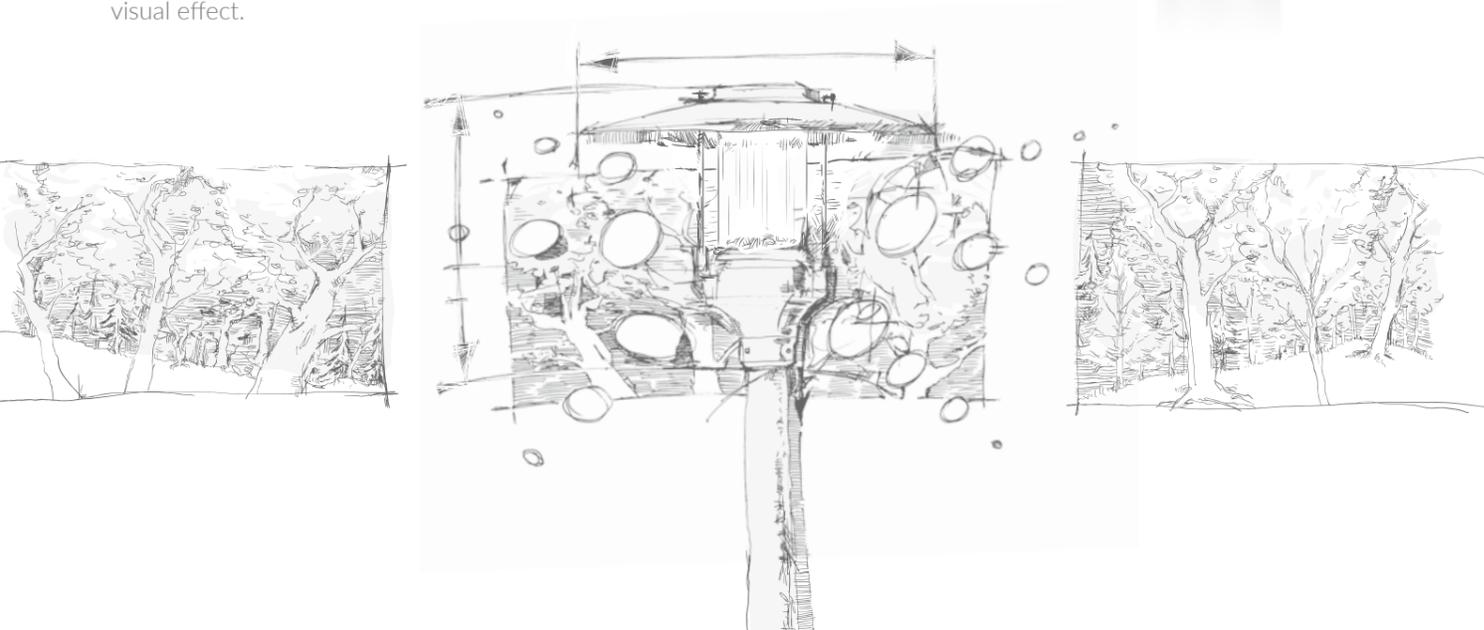


PROMENAD LED

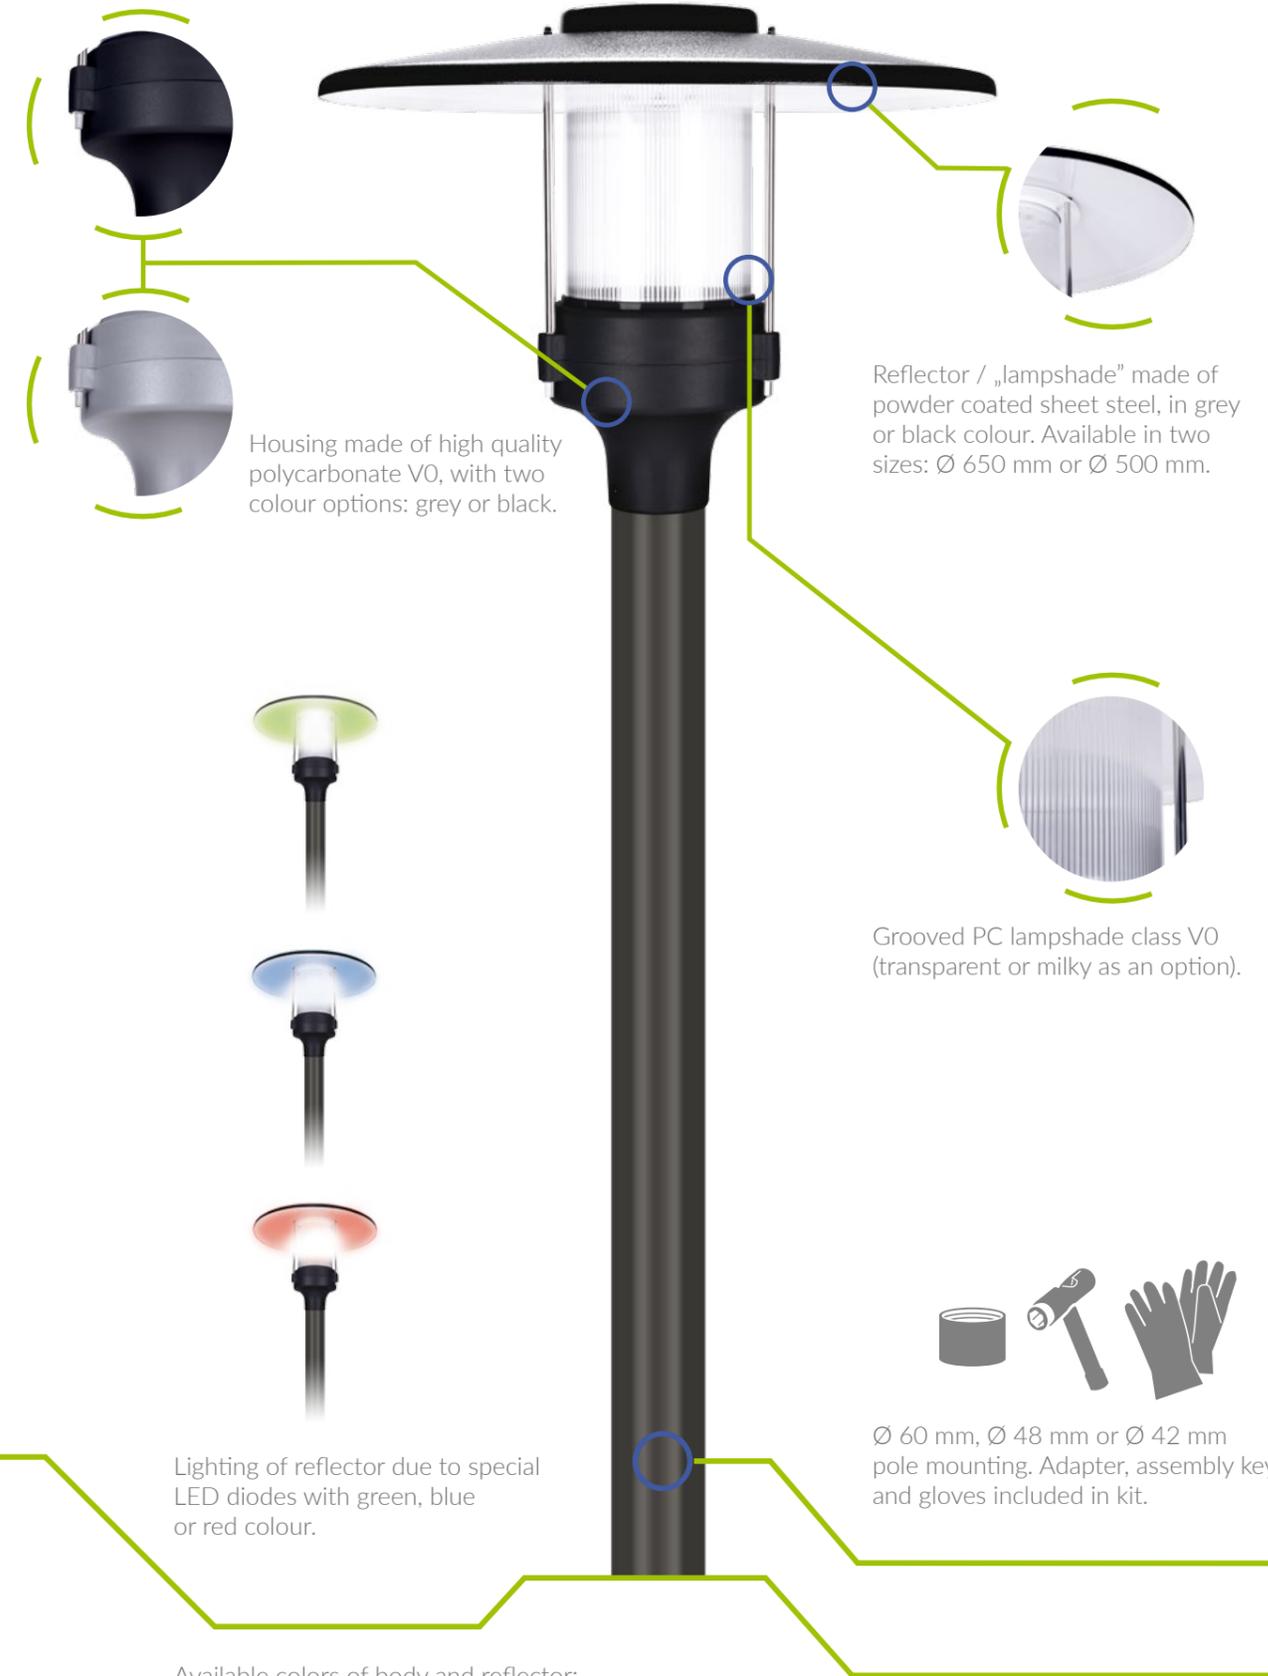


Available colors of body and reflector:

- Black: RAL 9005
- Grey: RAL 7045


Light distribution Promenad LED




Promenad Led 20W




Promenad Led 30W



Promenad Led 40W



Promenad Led 60W



Promenad Led ASM 30W

Technical data:

Model	Power	Luminous flux	Decorative lighting *	Colour temperature	Basic dimension	Weight (kg)
Promenad LED 20	21 W	1410 lm	-	4000 K	Ø 650 x 495 mm	5,4
Promenad LED 30	29 W	2295 lm	✓	4000 K	Ø 650 x 495 mm	5,4
Promenad LED 40	43 W	3160 lm	✓	4000 K	Ø 650 x 495 mm	5,4
Promenad LED 60	57 W	4275 lm	✓	4000 K	Ø 650 x 495 mm	5,4
Promenad LED ASM 30**	29 W	1993 lm	-	4000 K	Ø 650 x 495 mm	5,4

* Decorative lighting hat in the colors: blue, green or red

** Asymmetric lamp

Voltage	Frequency (f)	Power	Colour temperature	The total luminous flux of light sources	The number of LEDs	Protection class	IP rating	Mechanical resistance	Weight
230V	50 Hz	20 ÷ 60W	4000K lub 3200K (optional)	1410lm ÷ 4275lm *	8 ÷ 48 *	I	IP66	IK10	5,4 kg

* depending on the model

