



AAROLED

Aero LED 12W Chrome



Features

Dual purpose design allows installation in either an uplight or downlight orientation.

Comparable performance to 20W HQI.

Housing is manufactured from high purity marine grade aluminium and treated with a six stage chrome plating treatment and dry polyester powder coating.

Screws manufactured from marine grade stainless steel.

Tempered glass cover.

LED lifespan L70 40,000 hours.

Non-dimmable.

General Information

Lamp Type	LED
Colour / Finish	Chrome
IP Rating	IP65
Class Protection	1
Internal / External	Internal/External
Surface / Recessed / Suspended	Surface
Warranty (Years)	5
CE Mark	Yes
Height / Depth	110
Length / Diameter	275
Width	223


Technical Information

Wattage	12W
Lumens Delivered	900lm
Lm/W	75 Lm/W
CRI	Ra 80
CCT	4000k
Input	230V
Hertz	50/60Hz
Operating Temp	-20°C to 50°C

Technical Data - ETIM 6 - Ceiling-/wall luminaire (EC002892)

Suitable for wall mounting	Yes
Suitable for suspended mounting	No
With light source	Yes
Material housing	Aluminium
Colour housing	Chrome
Material cover	Glass transparent
Suitable for number of lamps	1
Voltage type	AC
Nominal voltage	230-230 V
Control gear included	Yes
Type of dimming	Not dimmable
Degree of protection (IP)	IP65
Protection class	I
Rated luminous flux acc. IEC 62722-2-1	900 lm
Colour of light	White
Colour temperature	4000-4000 K
Colour rendering index CRI	80-89
Surface finishing	Other
Length	275 mm
Width	223 mm
Lamp power	12 W
Lamp power at multiwatt	Not applicable
Suitable for emergency lighting	No
Emergency unit integrated	No
Suitable for ceiling mounting	No

Suitable for built-in mounting	No
Suitable for surface mounting	Yes
With light sensor	No
With movement sensor	No
Max. system power	12 W
Type of grid	None
Light sharing	Symmetric/asymmetric
Height/depth	110 mm
Ambient temperature	-20-50 °C
Suitable for light line configuration	No

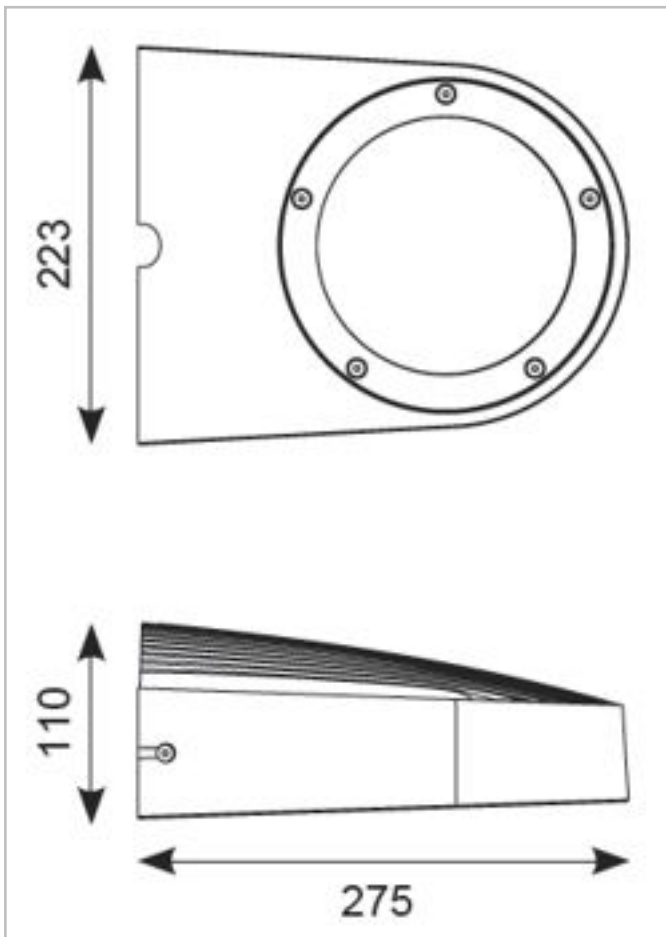

Datasheet generated from <http://www.electrika.com> last updated Thursday, December 7, 2017 12:00:13 PM