


# Invercote Creato

## Solid Bleached Board, GZ

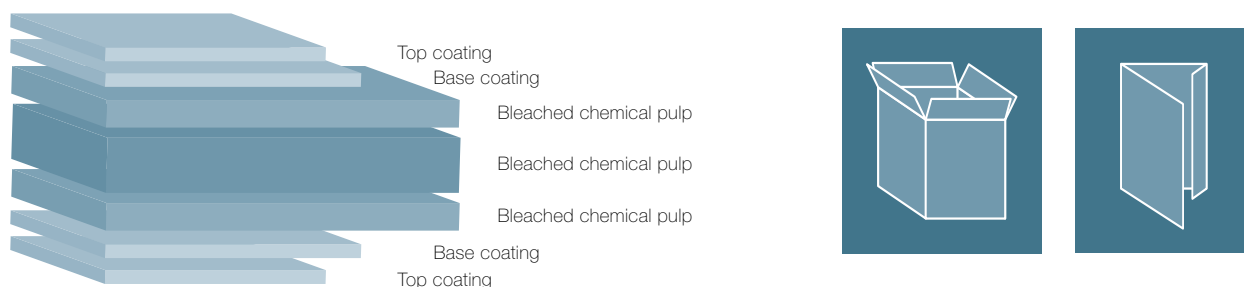

## Product description

Invercote Creato is designed for graphical products, and offers equal, outstanding aesthetic printing properties on both sides. Both sides are fully coated and have a matt finish. Invercote Creato has a smooth surface that is tailored to faithfully reproduce the most sophisticated printed images. This surface, combined with Invercote Creato's excellent structural, design and embossing characteristics, make it ideal for demanding graphical applications. The whiteness level is tailored to ensure the best print contrast and colour reproduction properties required for high-end print productions. A patented coating formula provides outstanding lightfastness, giving the end products a longer life.

Thanks to its composition of multiple layers of solid bleached primary fibres, Invercote Creato has a superior strength and toughness compared to board grades that contain mechanical or recycled fibres or single-ply bleached primary fibre board. This strength gives several advantages in designing and producing brochures, covers and cards of various kinds. In addition to traditional printing techniques, Invercote is qualified and certified for most digital printing presses on the market today and suitable for digital finishing technology.

Due to the excellent consistency of Invercote Creato its performance is predictable and dependable, making repeat print runs with the same machine settings and excellent print results possible.

Grammage (g/m <sup>2</sup> )	220	240	260	280	300	350	380	400
Thickness (µm)	230	260	290	315	345	415	457	485
Caliper (pt)	9.1	10.2	11.4	12.4	13.6	16.3	18.0	19.1
Tolerances: Grammage ± 5% (ISO 536) Thickness ± 5% (ISO 534)								

The range is further extended by Invercote Duo, available in grammages 430–710 g/m<sup>2</sup>.

Certifications						
Product related	ECF	PEFC credit material	FSC® Mix FSC-C110018	Food contact	Toy safety	Archiving
		2778 PEFC	TUEV-COC-000232	EC 1935/2004, EC 2023/2006 <sup>1)</sup> , American FDA, German BfR	EN 71 Part 3 EN 71 Part 9	ISO 9706
All fibres from sustainable and controlled sources in compliance with the EU Timber Regulation EC 995/2010.						
Mill related	ISO 14001	ISO 9001	FSC® C. o. C.	PEFC C. o. C.	OHSAS 18001	ISO 50001
EcoVadis Platinum Standard						
<sup>1)</sup> the GMP regulation, extended with CEPI GMP						

More information, application examples as well as environmental declarations and other certificates can be found at [www.iggesund.com](http://www.iggesund.com).

Product properties

Properties			
	Printing side properties - both sides identical		Methods/Remarks <sup>1)</sup>
		Tolerances	
Grammage (g/m <sup>2</sup> )	220-400	± 5%	ISO 536
Colour			
L* (%)	96.5	±0.8	ISO 5631-2
a*	2.3	±0.6	ISO 5631-2
b*	-7.8	±1.1	ISO 5631-2
Whiteness (%)	127	±5	ISO 11475
ISO brightness (%)	94	±2	ISO 2470
Surface roughness (µm)	1.2	≤ 1.6	ISO 8791-4
Board gloss 75° (%)	40	±10	ISO 8254-1
Surface pH	8.5	+1/-1.5	<sup>1)</sup>
Ink absorption (%)	35	-	<sup>1)</sup>
Surface strength IGT (m/s)			
blister	0.7	≥ 0.5	ISO 3783
pick	1.3	≥ 0.8	ISO 3783
Cobb (g/m <sup>2</sup> 60 s)	30	-	ISO 535
Ply Bond (J/m <sup>2</sup> )	160	≥ 120	TAPPI 569
Moisture content (%)	5.5	±1.0	ISO 287
Robinson taint	Below the detection limit of 0.6	-	EN 1230, DIN 10955

<sup>1)</sup> See section *General Technical Information*

Grammage dependent properties									Tolerances	Methods/Remarks <sup>1)</sup>
Grammage (g/m <sup>2</sup> )	220	240	260	280	300	350	380	400		
Thickness (µm)	230	260	290	315	345	415	457	485	± 5%	ISO 534
Opacity	96.8	97.3	97.7	98.1	98.5	99.0	99.3	99.5	-	ISO 2471
Bending stiffness L&W 5° (mNm)										
MD	10.1	13.5	18.7	24.3	30.1	47.8	64.5	72.4	-	ISO 5628
CD	4.8	6.4	8.9	11.6	14.4	22.8	30.2	33.6	-	ISO 5628
Bending resistance L&W 15° (mN)										
MD	108	150	204	265	300	520	705	820	-15%	ISO 2493
CD	49	70	95	122	151	250	330	375	-15%	ISO 2493
Bending moment Taber 15° (mNm)										
MD	5.2	7.2	9.8	12.8	14.5	25.1	34.1	39.6	-15%	ISO 2493
CD	2.4	3.4	4.6	5.9	7.3	12.1	15.9	18.1	-15%	ISO 2493
Tensile strength (kN/m)										
MD	21.0	22.0	23.5	24.0	25.0	28.0	30	31.5	-	ISO 1924-2
CD	10.5	11.0	11.5	12.0	13.0	14.0	14.5	15.0	-	ISO 1924-2
Tearing resistance (mN)										
MD	2050	2400	2800	3100	3200	4200	5000	5600	-	ISO 1974
CD	2300	2600	3100	3500	3700	4500	5400	6000	-	ISO 1974

<sup>1)</sup> See section *General Technical Information*

Issued: 02.2021

All properties are measured in test climate 23°C/50% RH at Iggesund mill. Tolerances and max/min levels, when stated, are based upon 95% confidence limits within each production run.