

PUNCTOLED IP65 2X5.5 W WT

PUNCTOLED IP65 | LED downlights



Product benefits

- Pleasant homogenous light
- Long lifetime thanks to LED technology
- Low profile

Product features

- Recessed LED downlight
- Type of protection: IP65
- Extremely low profile
- Solid aluminum housing in white
- Beam angle: 90°
- Color temperature: 3,000 K
- Lifetime: up to 50,000 h
- Protection class: II
- Dimmable (with suitable Phase-cut dimmers)



Product datasheet

Technical data

Electrical data

Operating mode	ECG
Nominal wattage	11 W
Connected load	11 W
Nominal voltage	220...240 V
Supply voltage	220...240 V


Photometrical data

Color temperature	3000 K
Color temperature [AGMP]	3000 K
Luminous flux	330 lm
Color rendering index Ra	>80
Color rendering index Ra [AGMP]	>80

Light technical data

Beam angle	wide distribution, 90 °
------------	-------------------------

Dimensions & weight




Diameter	80.0 mm
Height	35.0 mm
Product weight	0.5 kg

Colors & materials

Body material	aluminium
Product color	white

Product datasheet

Additional product data

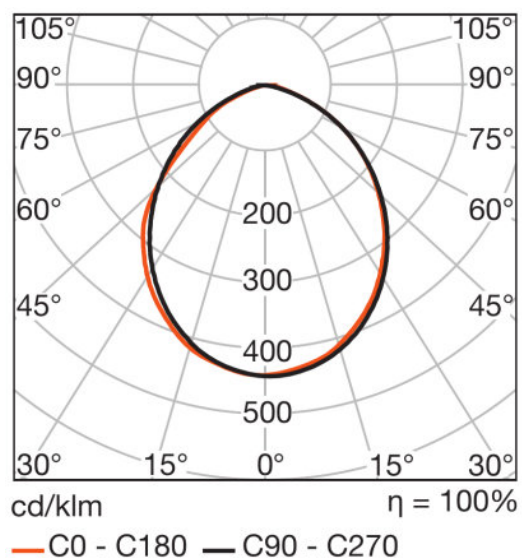

LDC typ polar

Number of lighting outlets	2
----------------------------	---

Capabilities

Type of installation	recessed
Adjustable	No

Certificates & standards

Protection class	insulation class II (safety insulation)
Type of protection	IP65

Country specific categorizations

Order reference	41193
-----------------	-------

Country specific information

Product code	METEL-Code	SEG number	STK number	UK Org
4052899910645	-	7474600	4107842	-

Product datasheet

Equipment / Accessories

- External control gear included (cabled on the secondary side)
-

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899910645	PUNCTOLED IP65 2X5.5 W WT	Folding carton box 1	136 mm x 91 mm x 237 mm	2.93 dm ³	591.00 g
4052899910669	PUNCTOLED IP65 2X5.5 W WT	Shipping carton box 4	289 mm x - x -	15.41 dm ³	2564.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.
