



Premium lighting solutions

HALF SURFACE REFLECTOR LIGHT BAR SERIES


Features

CERTIFICATE

Meet DOT and EMARK specifications for beam pattern control and output so you can drive without worry of failing an inspection.

NEW OPTIC DESIGN

Half surface reflector technologies, ultimate light distribution.

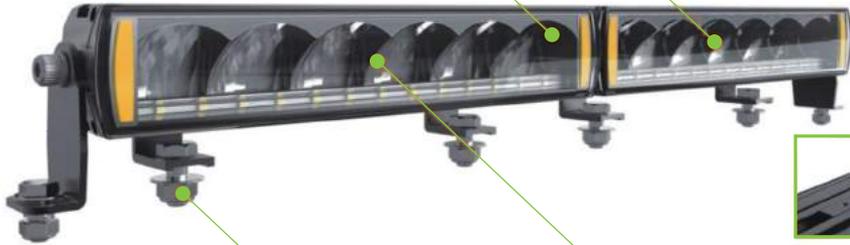

FLEXIBLE MOUNT

Backside bracket can be adjusted flexibility up side down, however without changing the light pattern.

UNIQUE LOOK

DRL design makes your vehicle stand out in the crowd.

CONNECTOR DESIGN

Can be connected to 6" and 10" light bar to increase the length of the light bar.



Specifications

Model	66486	66488
Total power	72W	120W
Lumens	3900LM	6500LM
LED chip	LP:6PCS*12W	LP:10PCS*12W
Voltage	12-48V DC	12-48V DC
Temperature	6000K	6000K
Beam Type	High Beam/fog Beam+parking	High Beam/fog Beam+parking
Life time	50000 hours	50000 hours
IP rating	IP67	IP67
Working temperature	-40°C ~ +60°C	-40°C ~ +60°C
Dimensions		

