



Turia L

672412.002 | Stand-by luminaires for escape route illumination

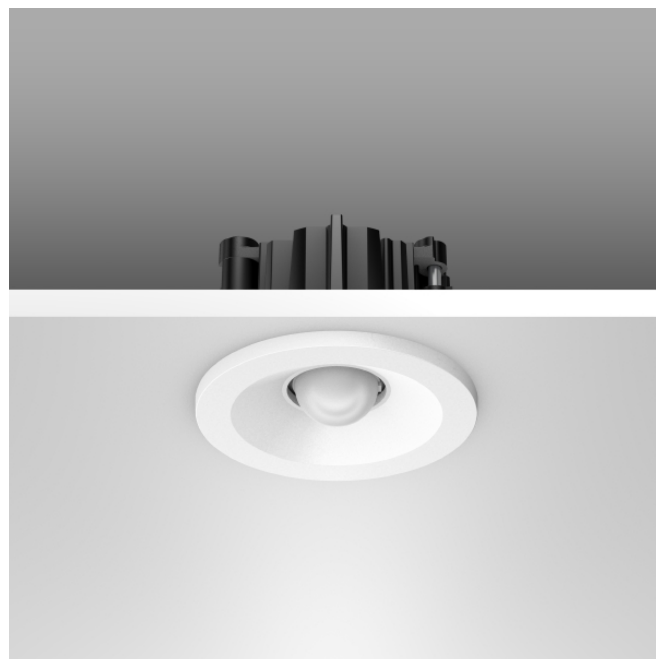

Recessed ceiling luminaires
4051859461791
LED
D 62, H 3, HEL 42



Round emergency luminaire for escape route lighting. Housing: die-cast aluminium. Bezel ring: plastic. Bezel ring: plastic. With plastic lenses for area lighting. Self-contained system with automatic self-test. With enclosed separate ceiling mounting ring also suitable for ceiling cut-outs of Ø 68 mm.

Emergency lighting

Emergency luminaire	Self-contained system
Battery Option	NiMH
Operating mode	Non-maintained power mode
Monitoring	Automatic self-test
Luminaire flux Mains/Emergency	270 / 190 lm
Duration time	3 h

Colour

Colour	white
--------	-------

Dimensions

Diameter D	62 mm
Height H	3 mm
Cut-out diameter DA	54-68 mm
Recess height HE	76-162 mm
Luminaire: recess height HEL	42 mm
Ceiling thickness S	1-35 mm
Weight	420 g

Lamp

Lamp	LED
Colour temperature	6500K
Colour rendering index (CRI)	80
Photobiological safety according to EN 62471	Risk group 1

Lighting technology

Colour temperature	6.500 K
Rated luminous flux	270 lm
Glare evaluation UGR (4H 8H) 1	40,5
Beam angle Down 1	137°
Beam angle combined Up 1	0°

Electrical

Control gear	Converter
Voltage	220 - 240 V / 50 - 60 Hz
System power, emergency	0,1 W
System power	4,3 W
Luminaire efficacy	63 lm/W

Approbations

Type of protection	IP 20
Protection class	II
Filament test	850°C - 30 seconds
Impact resistance	IK03 (0,35 Joule)
Safety marks	Einbauleuchte nicht bedecken!, F-mark
ULOR	0
Conformity mark	EAC
CIE Flux Code / CEN Flux Code	16 58 99 100 100
Energieeffizienzklasse 2019/2015	F
Maintained power	=> 0 °C ... + 35 °C
Non-maintained power mode	=> 0 °C ... + 35 °C