
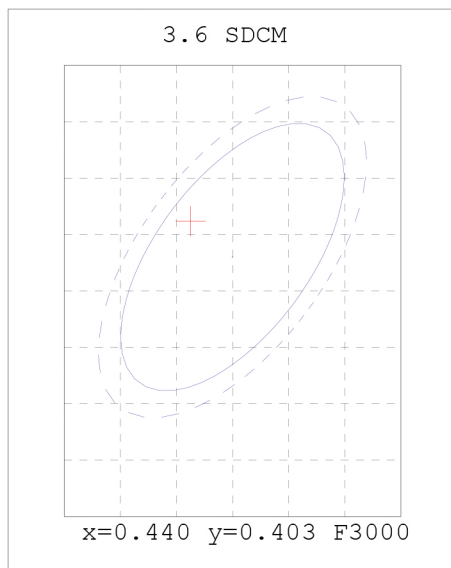


Light Source Test Report

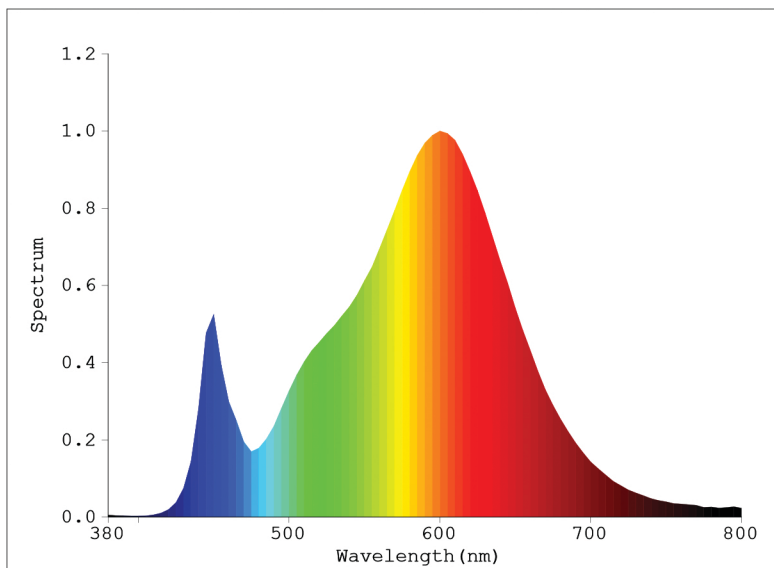

Color Parameters:

Chromaticity Coordinate: $x=0.4363$ $y=0.4062$ $u'=0.2493$ $v'=0.5221$

Tc=3028K Dominant WL:Ld=582.4nm Purity=52.9% Centroid WL:588.0nm

Ratio:R=24.0% G=73.7% B=2.2% Peak WL:Lp=600.0nm HWL:122.8nm

Render Index:Ra=80.2

R1 =78 R2 =89 R3 =96 R4 =78 R5 =78 R6 =86 R7 =81

R8 =55 R9 =-4 R10=76 R11=77 R12=68 R13=80 R14=98 R15=70

Photo Parameters:

Flux: 2230.2 lm Fe: 6.6955 W Efficacy:115.0 lm/W

LEVEL: WHITE:OUT

Electrical Parameters:

Luminaire: U=219.1V I=0.09200A P=19.40W PF=0.9570

Instrument Status:

Scan Range:380.0nm-800.0nm Interval:5.0nm[0]

REF=16729 (R=3)

%=-0.913%

Ip=4966 (G=3,D=53)

PMT: 29.4 centigrade [150.0]

QYL20160504

Product Type:RL3020WW
Number:174
Temperature:25.3 deg
Test Operator:L
Software:V2.00.100

Manufacturer:台创照明
Test Department:台创照明
Humidity:65.0%
Test Date:2016-05-26 09:20:43
Instrument:PMS-80_V1 (SN:1008070)