

LINEAR VERTICAL

Architectural Luminaire



Transparent
A Touch of Aesthetic






Distinctive

It is integrated with ultra-thin semi-transparent vertical optics, enveloped in a signature sloping silhouette where the frame meets the optics, precisely controlled optimal direct indirect distributions at a split of light between the direct surfaces below and the ambient area horizontal the fixture.

Visual Comfort

We strive to challenge the highest visual comfort standard by offering multiple professional lenses.

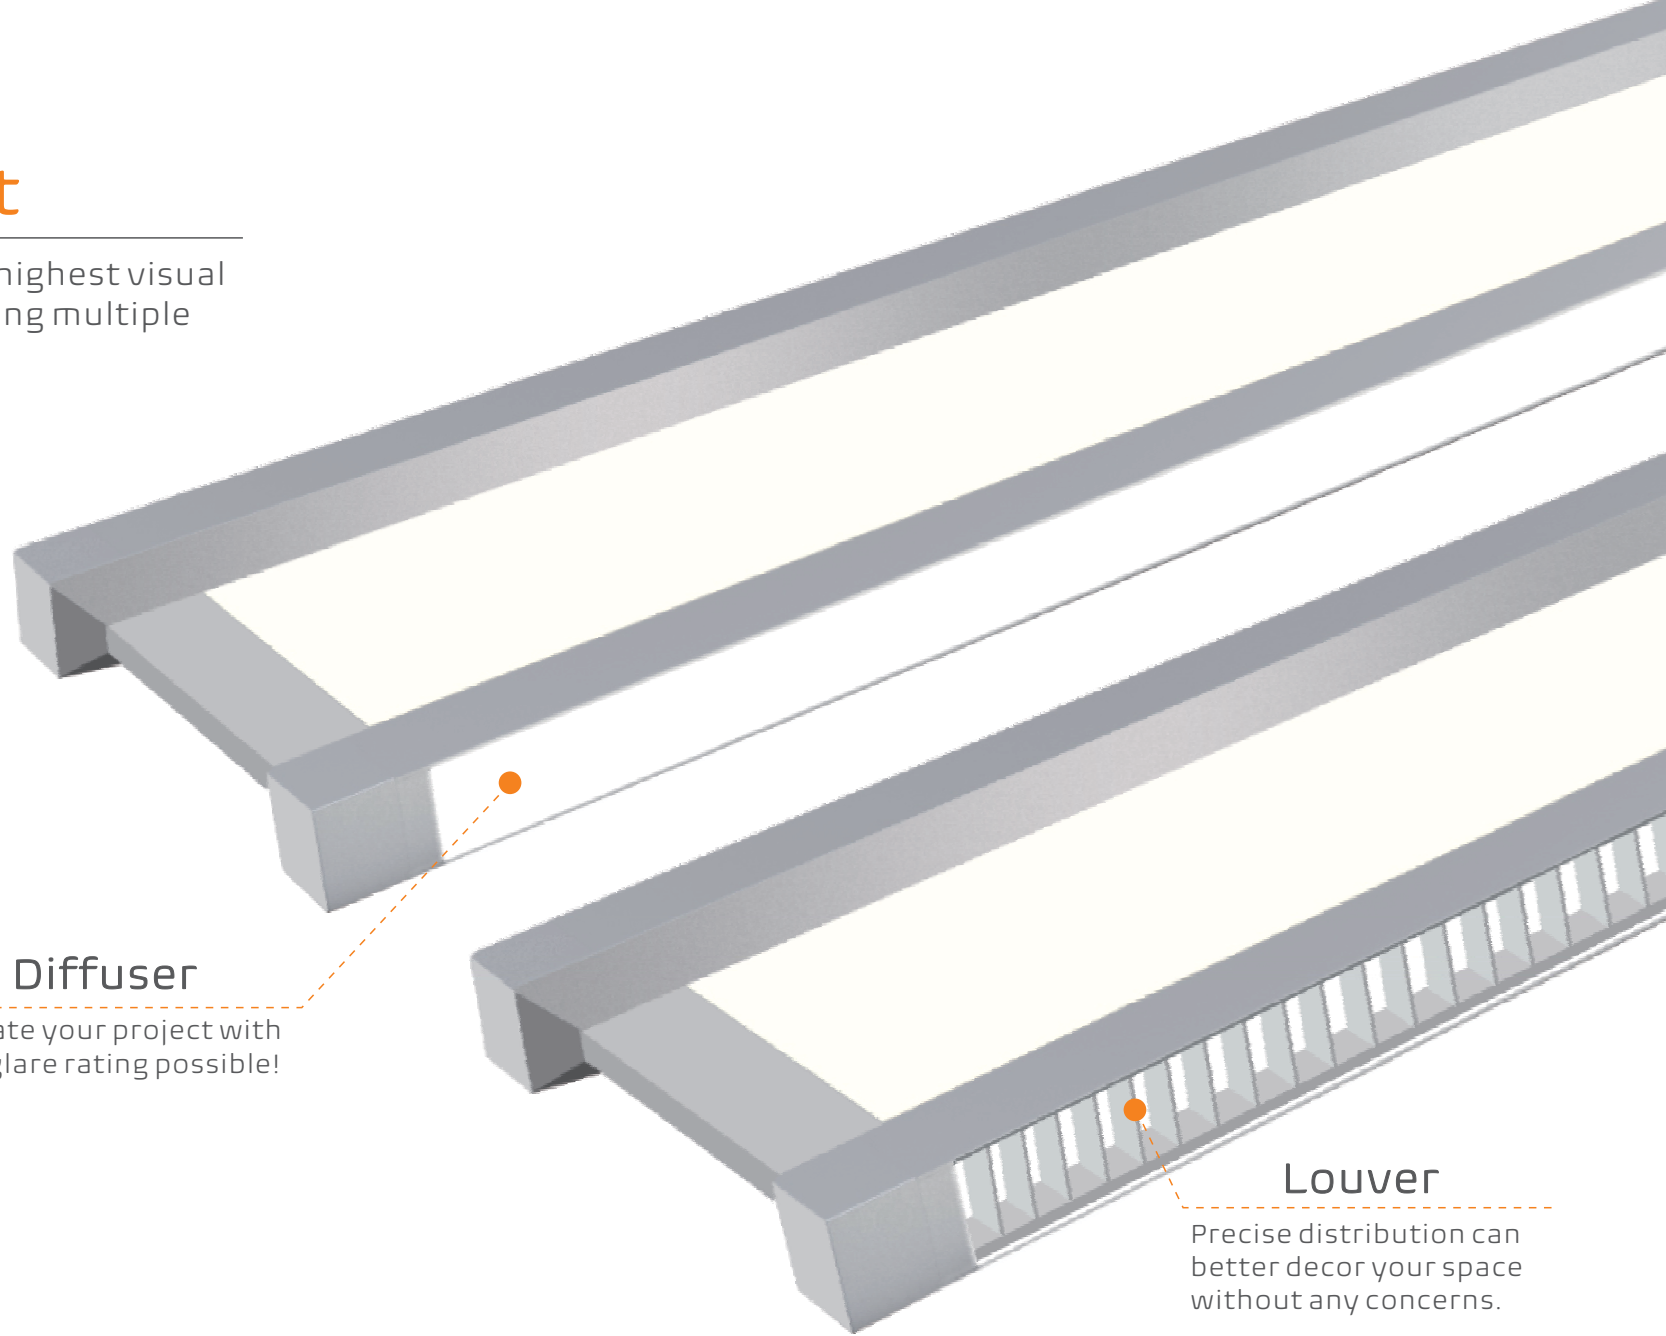

Diffuser

Elevate your project with low glare rating possible!

Louver

Precise distribution can better decor your space without any concerns.

Transparent Optics

Delicate Laser Dot

The ultra-thin semi-transparent optical light guide plate highly transmits the flux of LEDs and evenly delivers the lights at the horizontal sides.




Advanced Optics

The unique design makes it semi-transparent luminaire when off, excellent uniformity and efficiency when on.



Powerful


When suspended, the LV Series can provide smooth direct or indirect distribution, allowing for wider spacing between fixtures and better ceiling light uniformity.

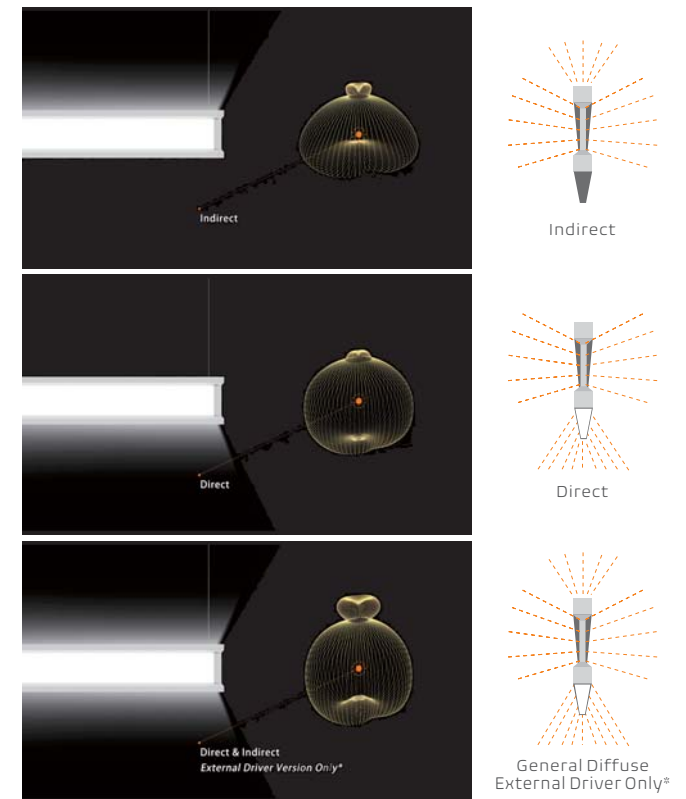




The Magic Of CCT Adjustable

Let you choose up to different 8 color temperatures*
Dual Circuits output, adjust CCT with 0-10V dimming system *



- Standard CCT adjustable only support 3 color temperatures.
- Multiple CCT adjustable option is available upon request.

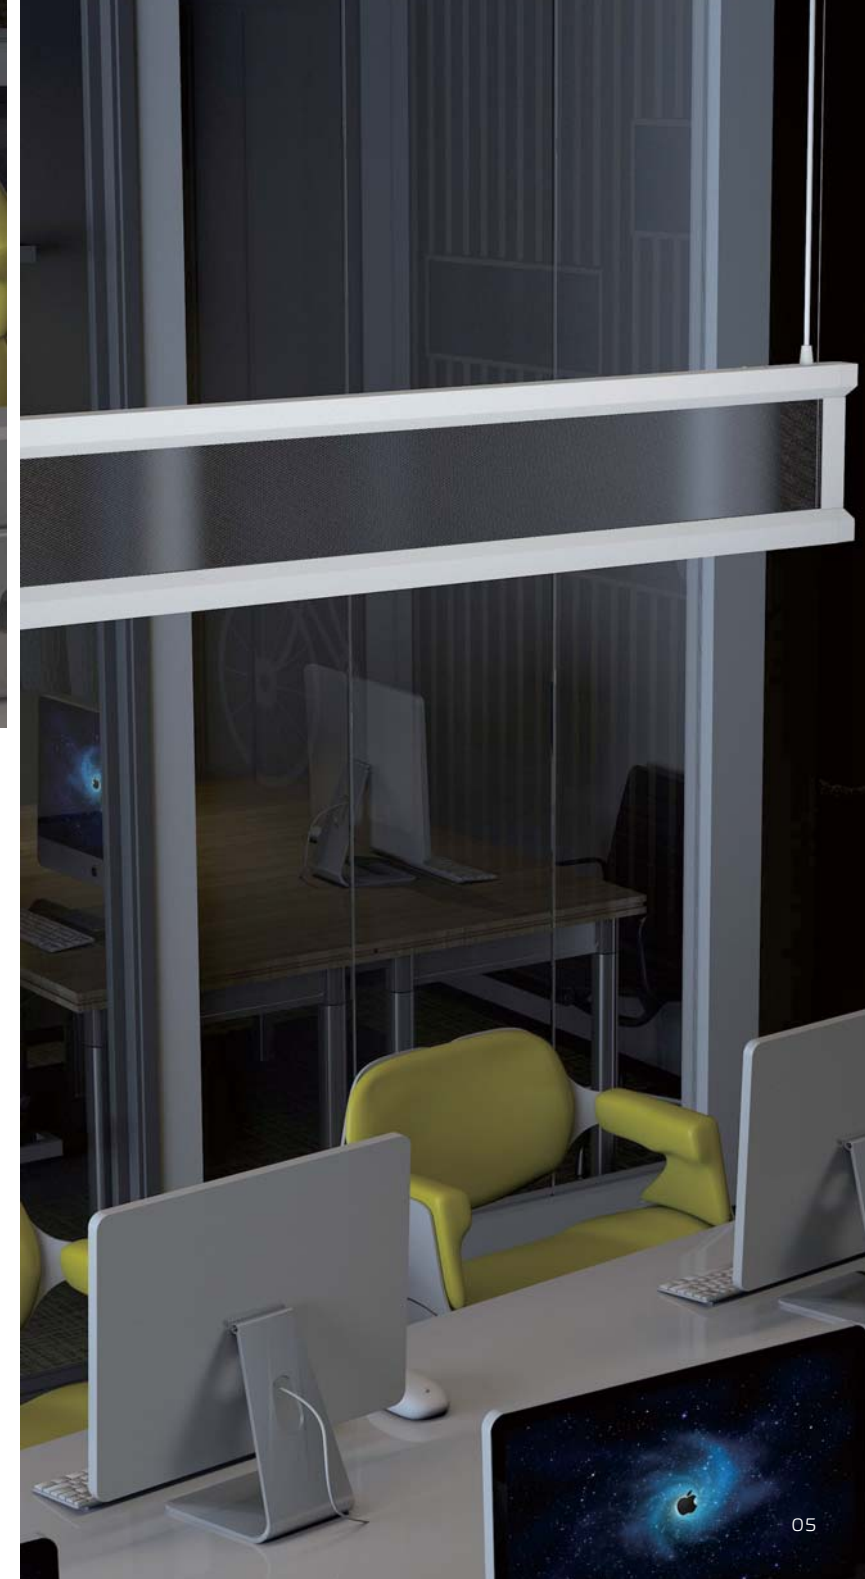



Application Flexibility

T-grid Or Dry Ceiling Compatible

Canopy Style



2 in. Round
Non Power Feed



4 in. Round
Power Feed



4 in. Round EM
Power Feed
Optional EM indicator



2 in. Square
Non Power Feed



4 in. Square
Power Feed



4 in. Square EM
Power Feed
Optional EM indicator

Note: Standard Configuration: 1 pc 4" canopy + 1 pc 2" canopy
Please specify if need to be custom.

Dry Ceiling



Dry ceiling only
Standard External. driver option
Easy access to driver from below




Dry ceiling only
Standard External. driver with EM option

Drop Ceiling / T-Grid Ceiling



T - Grid Clips


Suspending the luminaire in the T-grid.
Compatible for various T-grid, including
9/16" Flat, 9/16" Slot, 15/16" Flat...

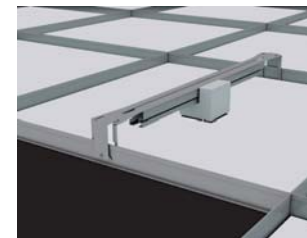

T - Grid Hangers

Suspending the luminaire between
the T-grid

*Please see the installation instruction for more details.

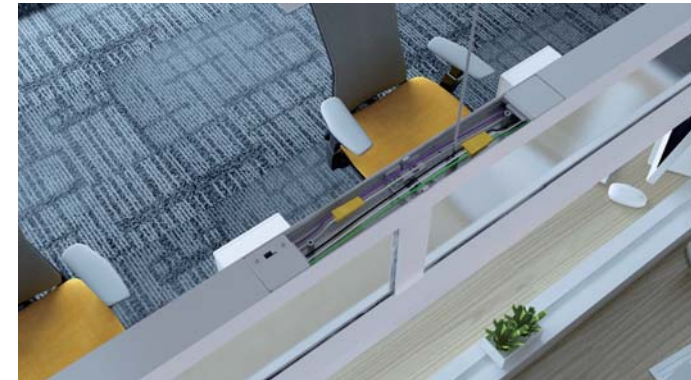

Simplicity Meets Performances

Each power feed connections up to 40ft.

Specification

Model	LV4-IXXXX	LV4-EXXXX
Driver Option	Internal	External
Wattage	40W	45W
Length	4'	4'
Efficacy	100lm/w, 1000lm/ft	100lm/w, 1100lm/ft
CCT Adjustable	3000K, 3500K, 4000K	3000K, 3500K, 4000K, 5000K
Diffuser Optics Options	✓	✓
Louver Optics Options	✓	✓
Lighting Distribution	Direct, Indirect	Direct, Indirect, General Diffuse
Input Voltage	110-277VAC	110-347VAC
RA>80	✓	✓
RA>90 Option	✓	✓
UGR<19 Option (Louver In Black)	✓	✓
Pendant In Dry Ceiling	✓	✓
Pendant In Drop Ceiling	✓	✓
Continuous Runs (Up to 40ft)	✓	✓
0-10V Dimming	✓	✓
Emergency Option	✓	✓
Sensor Option	✓	✓
UL/CUL	✓	✓

Dimensions

