

MV 426

Modular Ice Machine up to 225 kg

Item #:
Project:
Quantity:



FEATURES

- "Global Standard" 56 cm (22") slim-size width fits in most locations.
- Auto-Alert indicator lights- communicate about operating status: a diagnostic LED light guides the troubleshooting process and helps decisions regarding opening a service call.
- Front-facing Evaporator - Ice forming process inspection and routine cleaning operations may be accomplished simply removing the front panel.
- Hand-removable water distribution tube- routine cleaning has never been so easy!
- Embedded antimicrobial- Ag-Ion® antimicrobial is present in selected food-zone components
- External Components- All external panel components are crafted for optimal aesthetic appeal through superior fit and finish.
- Reusable air filter is easily removable from the outside for ease of cleaning (in air-cooled models).



MV L 426
Large Cube 17 g
W 29 x D 24 x H 29 mm



MV 426
Dice Cube 10 g
W 22 x D 24 x H 22 mm



MV HL 426
Half Large Cube 6 g
W 10 x D 24 x H 29 mm

CONDENSING SYSTEM

Air cooled
Water cooled

REFRIGERANT GAS

R404A

VOLTAGE V/Hz/ph

230/50/1
230/60/1

RECOMMENDED BINS

Head	Bins		kg

MV 426



SB193

129



SB322

168

CBT30EMCD

SB393

181

CBT30EMCD

SB530

243

LEGEND:

- ✓ : Perfect combination between ice maker and bin
- : Ice chute cut-out performed upon installation
- CBTxxxxxxx : need additional bin top

Certifications:



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free **App Scotsman Ice**
Apple store
Google play
Windows store



www.scotsman-ice.it
www.scotsman-ice.com


Modular Ice Machine up to 225 kg

MV 426

Modular Ice Machine up to 225 kg

Item #:
Project:
Quantity:

Modular Ice Machine up to 225 kg

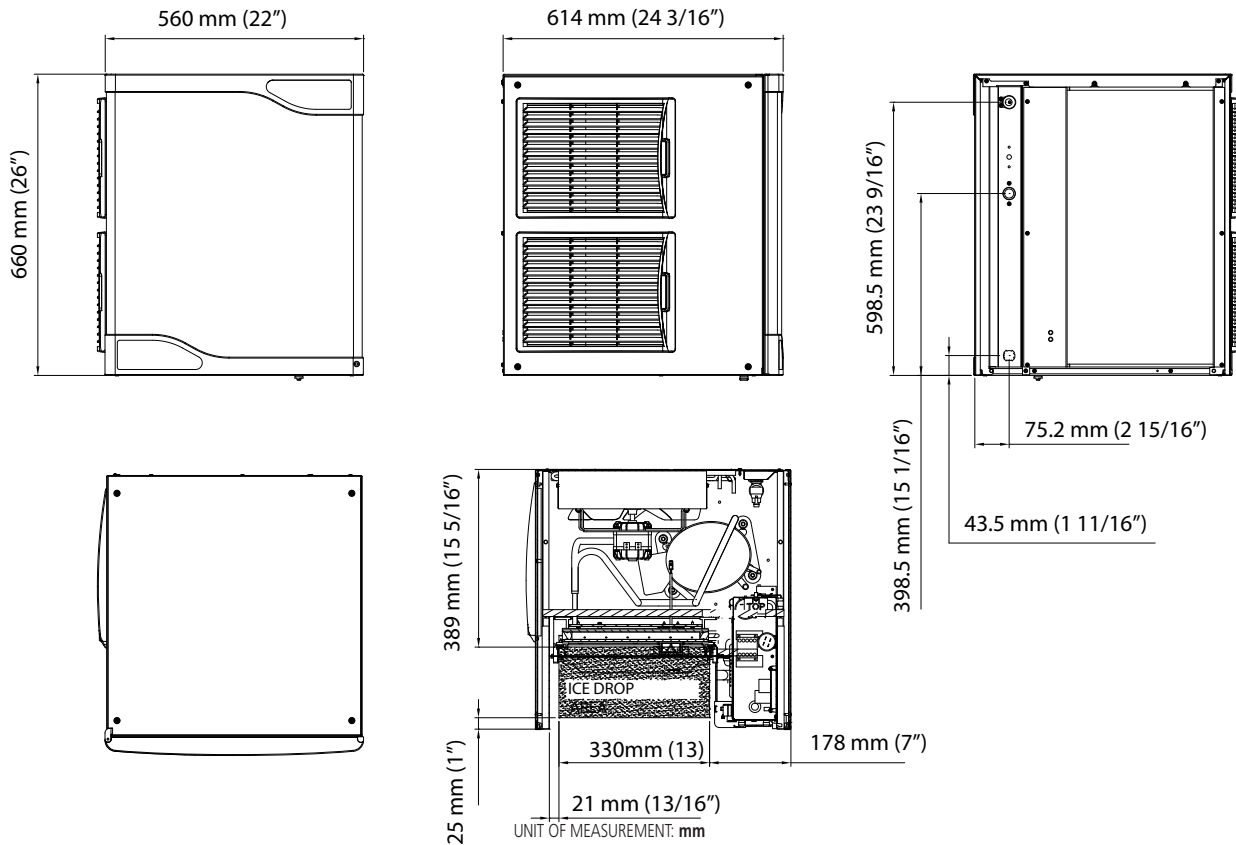

UNIT DATA	Compressor				Circuit wires		Max. fuse size
	Version	Voltage	Btu/h	W	No.	Ømm ²	A
Size (W x D x H)	560 x 610 x 700 mm	MV 426 AS	230/50/1	4958	1453	1	16
Net weight	68 kg	MV 426 WS	230/50/1	4958	1453	1	16
SHIPPING DATA	Carton (W x D x H) 630 x 690 x 810 mm Weight 80 kg	MV HL 426 AS	230/50/1	18497	5421	1	16
		MV HL 426 WS	230/50/1	18497	5421	1	16
		MVL 426 AS	230/50/1	18497	5421	1	16
		MVL 426 WS	230/50/1	18497	5421	1	16
		MVL 426 AS	230/50/1	18497	5421	1	16
		MV 426 AS	230/60/1	3955	1159	1	16
		MV 426 WS	230/60/1	3955	1159	1	16
		MV HL 426 AS	230/60/1	18497	5421	1	16

Version	Condensation	Voltage	24 h ice production kg			Energy consumption*		Water usage*	Instant power
			10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h		
MV 426 AS	Air	230/50/1	225	204	160	14.7	10.0	11.0	1100
MV 426 WS	Water	230/50/1	205	197	176	11.1	7.5	126.0	1000
MV HL 426 AS	Air	230/50/1	225	204	160	14.7	10.0	11.0	1100
MV HL 426 WS	Water	230/50/1	205	197	176	11.1	7.5	126.0	1000
MVL 426 AS	Air	230/50/1	225	204	160	14.7	10.0	11.0	1100
MVL 426 WS	Water	230/50/1	205	197	176	11.1	7.5	126.0	1000
MVL 426 AS	Air	230/50/1	225	204	160	14.7	10.0	11.0	1050
MV 426 AS	Air	230/60/1	225	204	160	14.7	10.0	11.0	1050
MV 426 WS	Water	230/60/1	205	197	176	11.1	7.5	126.0	890
MV HL 426 AS	Air	230/60/1	225	204	160	14.7	10.0	11.0	1050

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions