




4 210 58



4 210 00

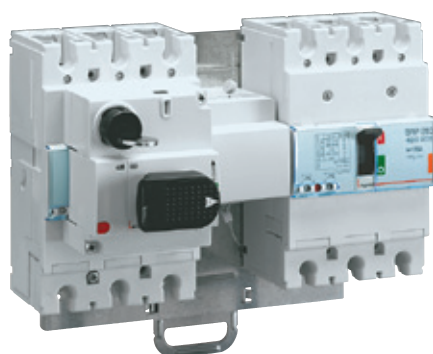

4 210 10



4 210 11



4 210 16



4 210 22

Pack	Cat.Nos	Supply inverter type
1	4 210 58	Plate for mounting and interlocking of 2 DPX ³
1	4 210 59	For fixed version
1	4 210 59	For plug-in and draw-out version
Rotary handles		
Direct on DPX		
1	4 210 00	Standard handle for thermal magnetic DPX ³ without earth leakage module
1	4 210 01	Standard handle for electronic DPX ³ and/or with earth leakage module
1	4 210 02	Handle for emergency use for thermal magnetic DPX ³ without earth leakage module
1	4 210 03	Handle for emergency use for electronic DPX ³ and/or with earth leakage module
Vari-depth handles		
For all version of DPX ³		
1	4 210 04	Standard handle
1	4 210 05	Handle for emergency use
Locking accessories		
1	4 210 06	Key barrel and flat key N° ABA90GEL6149 for direct handle
1	4 210 07	Key barrel and star key N° HBA90GPS6149 for direct handle
1	4 210 08	Key barrel and flat key N° ABA90GEL6149 for vari-depth handle
1	4 210 09	Key barrel and star key N° HBA90GPS6149 for vari-depth handle
Motor-driven handles		
Motor operators 24 to 230 V~ / =		
1	4 210 60	Side motor operator
1	4 210 61	Front motor operator
Locking accessories		
1	4 210 62	Key barrel and flat key N° ABA90GEL6149 for front motor operator
1	4 210 63	Key barrel and star key N° HBA90GPS6149 for front motor operator
1	4 210 64	Padlock for front motor operator
1	4 210 65	Key barrel and flat key N° ABA90GEL6149 for side motor operator
1	4 210 66	Key barrel and star key N° HBA90GPS6149 for side motor operator
1	4 210 67	Padlock for side motor operator

Pack	Cat.Nos	Auxiliaries
Auxiliary contacts		
1	4 210 10	1 N/C + 1 N/O auxiliary contact for rotary handles
1	4 210 11	Auxiliary contact or fault signalling contact
1	4 210 48	Signalling contact plugged-in / drawn-out (for DPX ³ plug-in version)
Shunt releases		
1	4 210 12	12 V~ / =
1	4 210 13	24 V~ / =
1	4 210 14	48 V~ / =
1	4 210 15	110-130 V~ / =
1	4 210 16	200-277 V~ / =
1	4 210 17	380-480 V~ / =
Undervoltage releases		
1	4 210 18	12 V~ / =
1	4 210 19	24 V~ / =
1	4 210 20	48 V~ / =
1	4 210 21	110-130 V~ / =
1	4 210 22	200-240 V~ / =
1	4 210 23	277 V~
1	4 210 24	380-415 V~
1	4 210 25	440-480 V~
Locking accessory		
1	4 210 49	Padlock for locking in "open" position
Communication interface		
1	4 210 75	Modbus