

AF 124

Self Contained Ice Machine up to 120 kg

Item #:
Project:
Quantity:



FEATURES

- Agion: the technology that makes products cleaner and longer lasting with built-in protection working 24/7 to resist the growth of microbes and the development of unpleasant odors.
- Clean alert: advises with a blink when it's time to clean the filter.
- Electronic control: ambient and water temperatures may change throughout the years but your ice maker will stay the same.
- Front access condenser air filter: a do-it-yourself cleaning operation that saves time and money and makes your ice maker live longer.
- Water in / ice out concept (no cycles, zero water wastage): limits to almost zero excess energy, water and time wastage.
- Ergonomic access to ice with sliding disappearing door: one-touch door lift, makes barman's life significantly easier.
- Built-in storage bin: allows most undercounter installations for easier fit-in solutions.



AF 124
Flake ice
Residual water content 25%

CONDENSING SYSTEM

Air cooled
Water cooled

INTERNAL BIN CAPACITY

40 kg

REFRIGERANT GAS

R404A

OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

Certifications:



IMPORTANT NOTICE:
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free App Scotsman Ice
Apple store
Google play
Windows store



www.scotsman-ice.it
www.scotsman-ice.com


Self Contained Ice Machine up to 120 kg

AF 124

Self Contained Ice Machine up to 120 kg

Item #:
Project:
Quantity:

Self Contained Ice Machine up to 120 kg

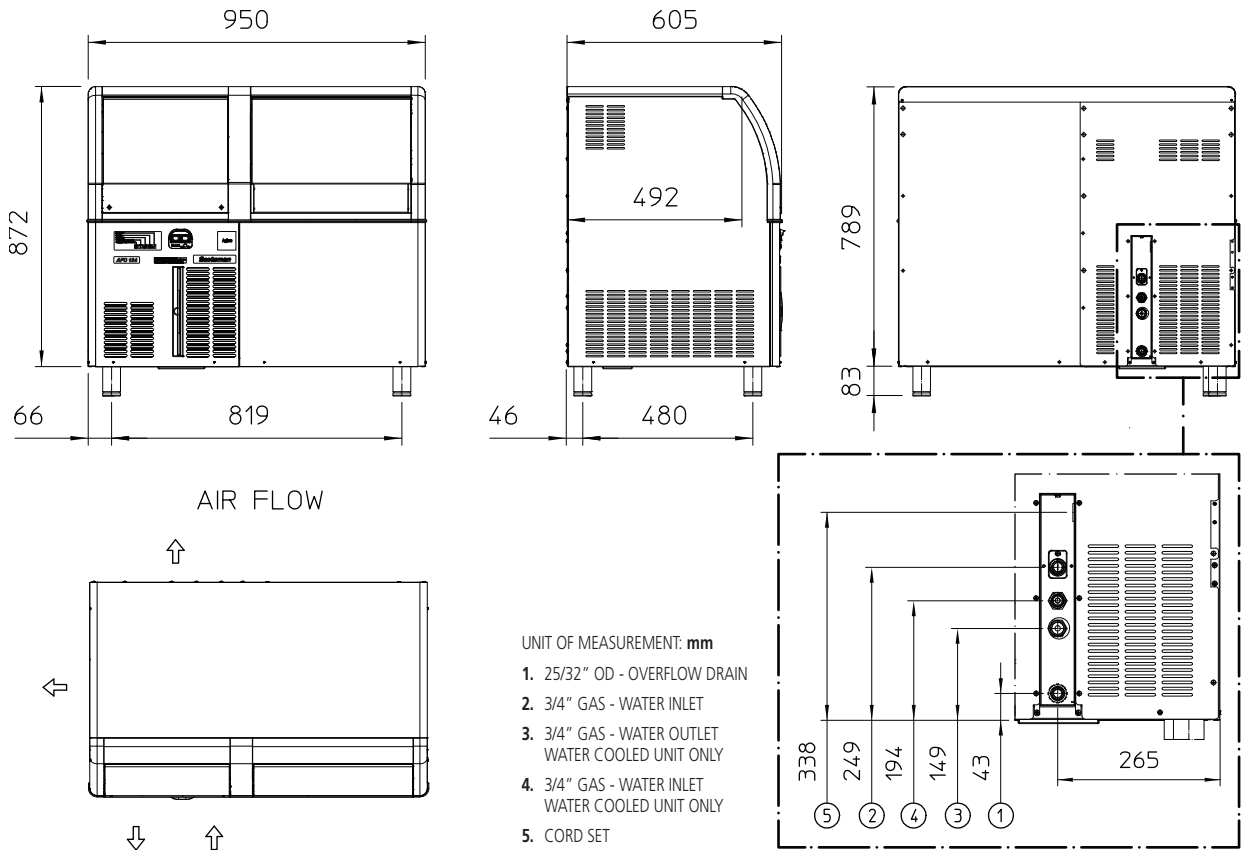

UNIT DATA			Compressor		Circuit wires		Max. fuse size		
			Version	Voltage	Btu/h	W	No.	Ømm ²	A
Size (W x D x H)	950 x 605 x 872 mm		AF 124 AS	230/50/1	3378	990	3	1.5	10
Net weight	66 kg		AF 124 WS	230/50/1	4538	1330	3	1.5	10
			AF 124 AS	230/60/1	3378	990	3	1.5	10
SHIPPING DATA									
Carton (W x D x H)	1030 x 680 x 960 mm								
Weight	77 kg								
			24 h ice production kg °C Amb. / °C Water			Energy consumption*		Water usage*	Instant power
Version	Condensation	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
AF 124 AS	Air	230/50/1	120	112	92	11.5	10.5	4.0	470
AF 124 WS	Water	230/50/1	120	114	94	12.7	11.9	29.8	470
AF 124 AS	Air	230/60/1	120	112	92	11.5	10.5	4.0	470

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions